

ComLink LT^{3G}

DEVICE SPECIFICATIONS

- ▲ DIMENSIONS: 8.6"H x 11.8"W x 2.9"D
- ▲ WEIGHT: 6.0 LBS.
- ▲ DISPLAY: 12.1" SUPER SHARP 1024 x 768
- ▲ PROCESSOR: POWERFUL 1.5 GHZ
INTEL® CORE2DUO™ PROCESSOR
- ▲ MEMORY: 2 GB OF RAM MEMORY
- ▲ STORAGE: 160 GB HDD
- ▲ OPERATING SYSTEM: WINDOWS XP PRO®
- ▲ BATTERY TYPE: LI-ION WITH
EXCEPTIONAL RUNTIME
- ▲ PORTS: USB (4), ETHERNET, MODEM,
eSATA, 1394 FIREWIRE, AUDITORY
PROMPT SPEAKER, MIC AND HEAD
PHONE JACKS

COMLINK LT^{3G} STANDARD CONFIGURATION

INCLUDES

- ▲ THE GRID 2 COMMUNICATION SOFTWARE
WITH SYMBOLSTIX SYMBOLS (TOBII
COMMUNICATOR WITH SYMBOLSTIX
SYMBOLS AVAILABLE AS AN OPTION)
- ▲ HUGE LIBRARY OF PRE-BUILT PAGE SETS
- ▲ USB EXTERNAL KEYBOARD
- ▲ WIRELESS LASER MOUSE
- ▲ FRS FLEXABLE™ INFINITELY ADJUSTABLE
HANDLE AND STAND
- ▲ BUILT-IN GEWA® ECU FOR TV,
PHONE, STEREO CONTROL AND
LIGHTING CONTROL
- ▲ BUILT-IN WI-FI 802.11 A/B/G/N AND
BLUETOOTH 2.0 WIRELESS
- ▲ SINGLE AND DUAL SWITCH SCANNING
INPUT PROVIDED AT NO CHARGE
- ▲ FRS REMOTE HELP DESK CAPABILITY



What Makes the ComLink LT^{3G} "Better By Design"?

FRS FLEXABLE™ STAND

The patent pending FRS FlexABLE™ Stand allows you to optimize visibility and reduce screen glare induced by overhead lighting. Unlike competitive fixed-position designs, our FlexABLE™ Stand provides infinite adjustment for precise, glare-free positioning. Competitive designs using fixed prop legs create rigid obstructions that can be harmful for spastic users who unintentionally contact the device. Our revolutionary FlexABLE™ Stand eliminates this danger by allowing the device to deflect upon impact, making it a soft and safe, positioning solution.

FRS FLEXABLE™ HANDLE

The patent pending FRS FlexABLE Handle is exceptionally easy to grip even for those with very limited dexterity, providing a new level of independence for many users.

PRODUCT TOUR

The intuitive easy-to-navigate Product Tour lets you take a "test drive" of the extensive array of pre-built page sets and ComLink LT^{3G} capabilities at anytime.

POWERFUL PROCESSOR

The Powerful 1.5GHz Intel® Core2Duo™ Processor together with 2GB of RAM provides ample processing power to run communications software, Skype™ video and still run your favorite processor intensive applications. Try that with the other guys!

ULTRA HIGH CAPACITY BATTERY SYSTEM

Our fully-integrated high capacity battery system maximizes runtimes allowing users to remain mobile even under the most demanding environments. The system utilizes light weight Li-ion batteries that deliver an impressive 11,400 mAh of power making the ComLink LT^{3G} an industry leader in runtime and mobility.

LARGE 12.1" DAYLIGHT VIEWABLE TOUCH DISPLAY

The Large 12.1" Daylight Viewable Touch Display offers vivid color and maximum viewability in all lighting conditions, including outdoors.

DUAL AMPLIFIED SPEAKERS

We have engineered the Dual Amplified Speakers to provide exceptionally loud and clear voice output with a rich high quality tone that will not break up at high volume levels like many others do.

COMPREHENSIVE VIDEO TRAINING TUTORIALS

All devices ship with our latest FRS Video Training Tutorials preloaded and free of charge. This means you can quickly become an expert user, while learning at your own pace, without the need for reading lengthy manuals or attending inconvenient training seminars.

FRS REMOTE HELP DESK


The built-in FRS Remote Help Desk feature allows our skilled technical support team members to take control of your device remotely to solve technical issues, upload and download files or page sets or just show you how to perform a programming function right on your device.

AUTOMATIC USER FILES BACKUP SYSTEM

The ComLink LT^{3G} Automatic User Files Backup system protects critical files from accidental deletion or changes. Best of all, it is performed automatically.

Introducing the all new 3rd Generation... ComLink LT^{3G}

"The Ultimate in Power, Viewability, and Accessibility"

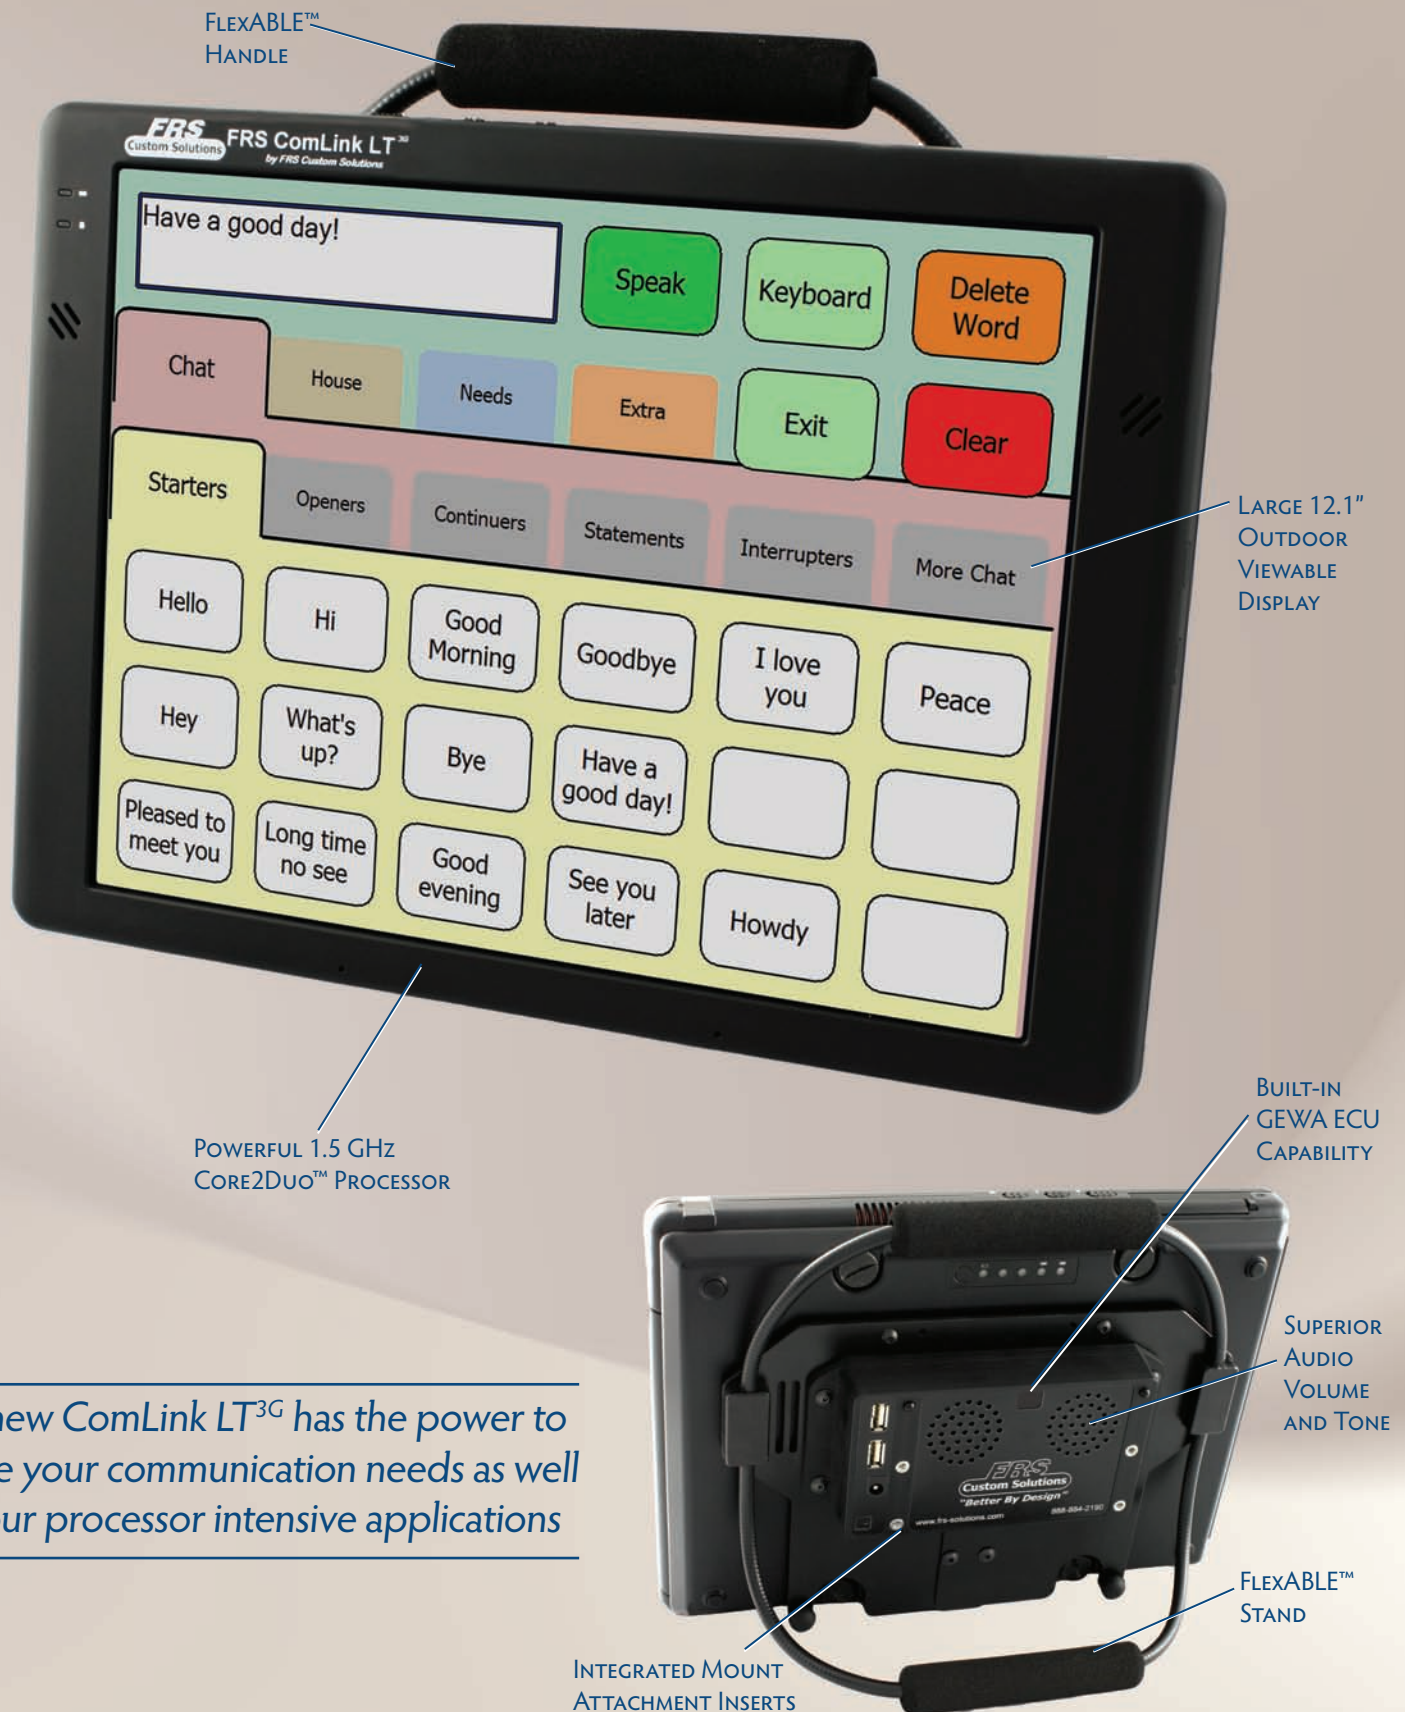

The new ComLink LT^{3G} has the power to handle your communication needs as well as your processor intensive applications