




Talara Digital Recording Communication Aids

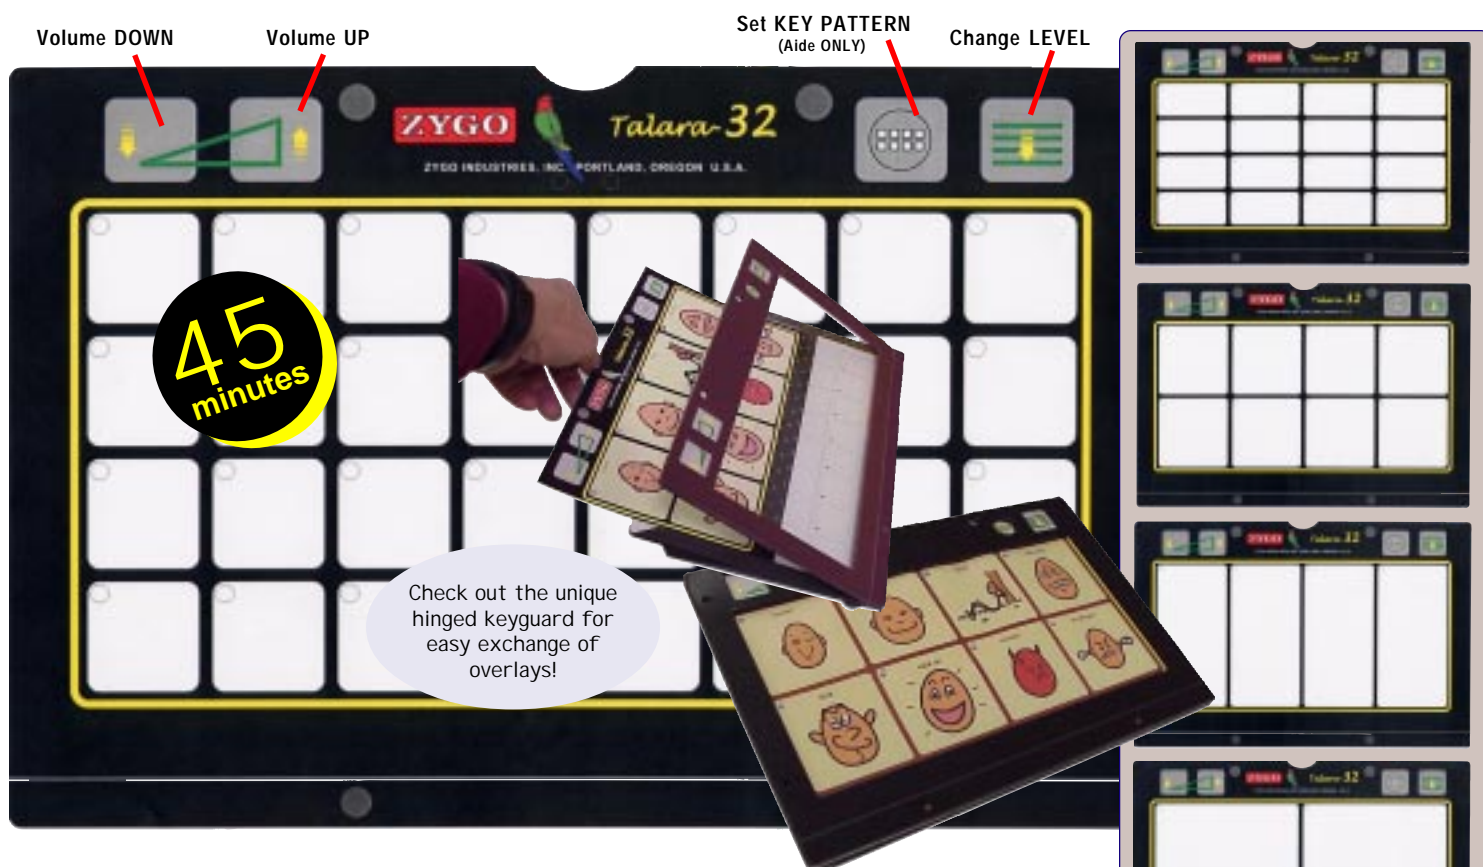

Absolute simplicity! Record messages and play them back. The **Talara-32** is another new breed of digital recording communication aids from ZYGO. *Features are:*

- **45 Minutes** recording time!
- **No limit to the amount in each key.**
- Re-record on demand with remaining unused memory available.
- **4 Levels — 127 Messages.**
- **Enlarged-key patterns — 32-, 16-, 8-, 4-Vertical, 4-Horizontal, 2-Key.**
It's like having **6 models in one!**
- Simplified **single-switch scanning**: Manual, Automatic, Row/Column.
- Uses **4-alkaline batteries**, disposable.
- **NiMH rechargeables are optional.** Rechargeable batteries are charged in a separate device.
- The user has access to 3 Function keys: **Volume UP**, **Volume DOWN**, and **LEVEL**.
- All this simplicity and quality, with the 30-year reputation of ZYGO Industries, Inc.

The **Talara-32** is rugged, lightweight and ergonomically shaped.

Call for a demonstration today! **(800) 234-6006**

Medicare Assignment Accepted
Medicare Code E2506

Price: \$750.

ZYGO Industries, Inc. PO Box 1008
16260 SW Upper Boones Ferry Road
Web Site: www.zygo-usa.com

Portland, OR 97207-1008 U.S.A.
Portland, OR 97224-7220 U.S.A.
E-mail: zygo@zygo-usa.com

Toll Free: (800) 234-6006
TEL: (503) 684-6006
FAX: (503) 684-6011

Characteristics and specifications

Talara-32

RECORDING TIME:

45 minutes, minimum

No limit to the percentage recorded in each key

Minimum message length: 1 second

NUMBER OF MESSAGES:

127 messages (4 levels of 32)

MESSAGE KEYS:

32 membrane keys (4 x 8 pattern)

SPACING: 3.2 cm (1-1/4") between centers

SIZE: 2.8 cm (1-1/8") square

FORCE REQ'D: 114 gr (4 oz) Maximum

PANEL: White keys on black background

FUNCTION KEYS: 4 membrane keys—2 Pair

Volume UP

Volume DOWN

Set KEY PATTERN (Record mode ONLY)

Change LEVEL

SIZE: 2.2 cm (7/8") square

FORCE REQ'D: 114 gr (4 oz) Maximum

OVERLAY COVER: Clear acrylic

RETAINING RING: Hinged—Locks overlays in place

MICROPHONE: Internal

SPEAKER: 7.6 cm (3") permanent magnet type

OUTPUT VOLUME: Adjustable from off to loud

OPERATING TIME BEFORE BATTERIES NEED REPLACING...

8 hours continuous sound output



Operating modes

CONTROLS:

POWER ON / OFF switch

RECORD / PLAY switch

SCAN METHOD switch

SCAN SPEED Rotary Control

5 seconds per step to

1 second per step,

Automatic Delay Time

CLEAR-ALL button (Resessed)

JACKS: 3.5 mm Diameter for single switch

USER ACCESSIBLE FUNCTIONS (from the keyboard):

Volume control—8 sound levels

Levels—4 message levels

ENLARGED KEY PATTERNS: (No dead spaces)

4 rows x 8 columns

4 rows x 4 columns

2 rows x 4 columns

2 rows x 2 columns

1 row x 4 columns

1 row x 2 columns

MESSAGE RETRIEVAL:

Single key press

Scanning (Left-to-Right and Right-to-Left for all modes)

MANUAL Linear and Directed

AUTOMATIC Linear

ROW/COLUMN

KEY BEEP: Auditory feedback for empty key selection

KEYGUARDS: Keyguards are hinged for easy overlay insertion and are available for each of the standard key patterns

Keyboard Size:	29.2 cm W x 19.7 cm H (11-1/2" W x 7-3/4" H)
Height from flat surface:	Front—1.3 cm (1/2") Back—6.4 cm (2-1/2")
Weight:	0.8 kg (1.75 lbs)
Battery Power:	Replaceable 4 x AA Alkaline Cells
Optional:	Replaceable/Rechargeable 4 x AA NiMH Cells and Charger

ZYGO INDUSTRIES, INC.

P.O. BOX 1008

Portland, OR 97207-1008 U.S.A.

TEL: (503) 684-6006 FAX: (503) 684-6011

U.S.A. & Canada: (800) 234-6006

E-mail: zygo@zygo-usa.com

Web Site: <http://www.zygo-usa.com>